


GENERAL CONFIGURATION OF THE INTERNATIONAL SINGLES COURT

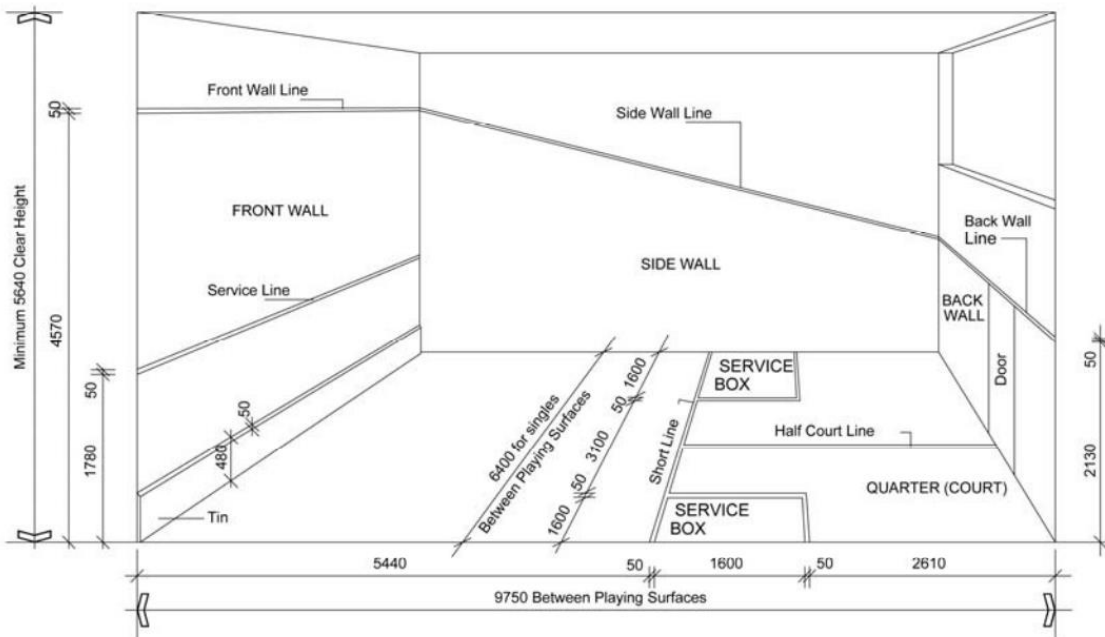

NEAR SIDE WALL OMITTED FOR CLARITY

DIAGONALS FOR SINGLES 11665

Dimensions of Singles Squash Court

Also applicable for Racketball


Diagram 1

December 2012

**WORLD
SQUASH**

WSF

GENERAL CONFIGURATION OF THE INTERNATIONAL DOUBLES COURT

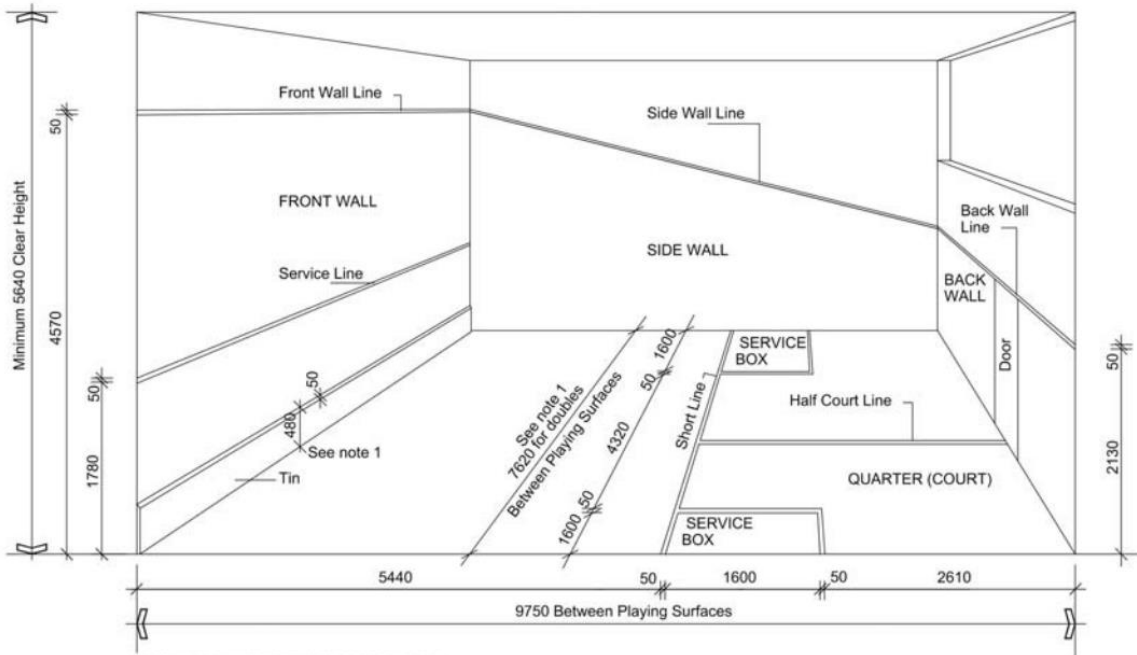

NEAR SIDE WALL OMITTED FOR CLARITY

Dimensions of Doubles Squash Court

NOTE 1

International Competition Width. For WSF recognised World and Regional events and Commonwealth Games, the width of the court between playing surfaces may be expanded from 7620mm to 8420mm and from July 2012 the height above the floor to the top of the tin shall be 330mm.


Diagram 2

September 2014

**WORLD
SQUASH**

WSF

GENERAL CONFIGURATION OF THE HARDBALL DOUBLES COURT

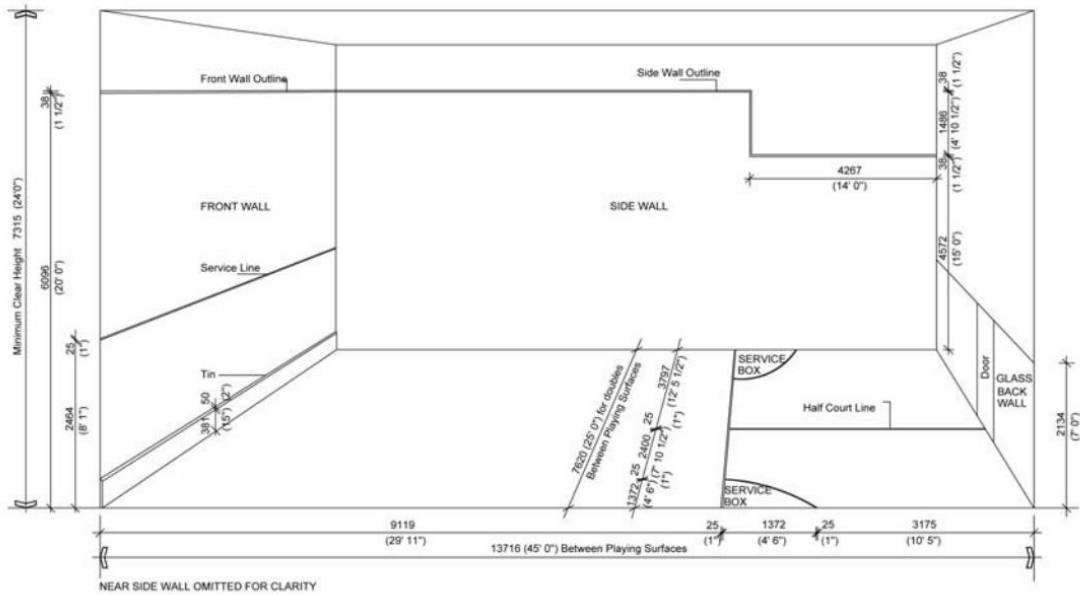


DIAGONALS FOR DOUBLES 15691 (51' 5 3/4")
Dimensions of Hardball Doubles Squash Court

Diagram 3
 July 2012


**WORLD
 SQUASH**

WSF


THE USE OF COLOUR AND DESIGN

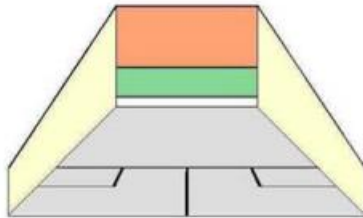


1. There shall be no more than three different colours on the wall playing surfaces within the court.

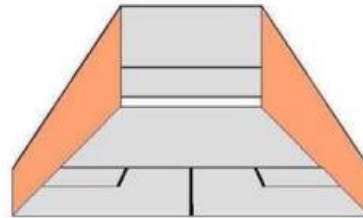


2. Each of the side walls shall be one colour and each side wall shall be the same colour.

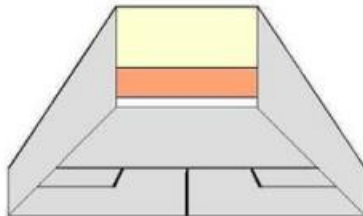


3. The front wall may be two colours, one below and one above the service line. The front wall colours need not be the same colour as the side wall colours.

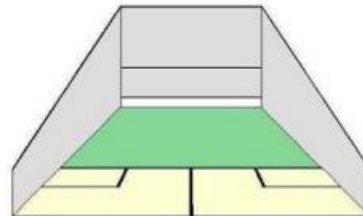


4. The floor shall have no more than two colours and each colour shall be bounded on at least two sides by the floor markings. The use of colours shall be symmetrical about the half court line. Natural wood materials shall be considered to be one colour providing the whole complies with clause 10.5.

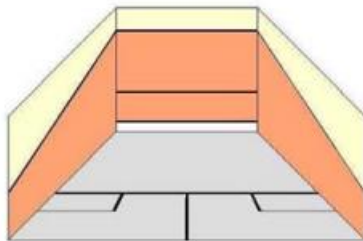


5. All colours shall have a minimum reflectance value of 50% and all colours shall be of the same reflectance value + or - 10%.
6. Colours will be permitted on all new and existing courts providing that the average illumination does not fall below the recommended standard of 500 lux or the minimum standard of 300 lux.
7. Out of court wall surfaces shall have a reflectance value the same or higher than any of the colours used on the play wall surfaces.
8. The ceiling shall have a minimum reflectance value of 80%.

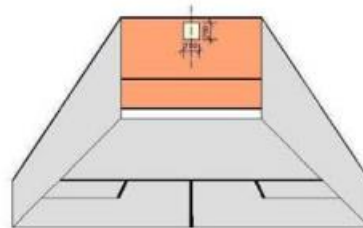

9. Stripes or patterns of any type will not be permitted on the wall playing surfaces except on the front wall at a minimum height of 3600mm above the floor where a logo, club or sponsors name may be used providing it is not more than 750mm square and located central on the front wall.
11. The minimum reflectance value of any of the colours used in any logo or name shall be 90%.

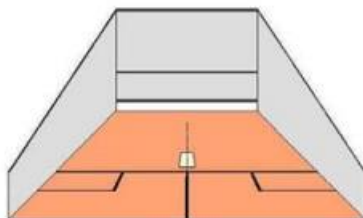

10. A logo, club or sponsors name on the floor will not normally be permitted however individual designs may be specifically approved by the WSF upon request.
11. The minimum reflectance value of any of the colours used in any logo or name shall be 90%.

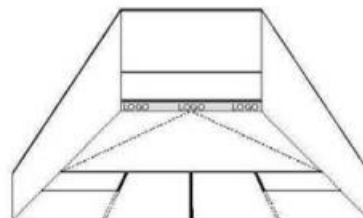

12. The tin may be of any colour and contain advertising, logos, club or sponsors names providing no part has a reflectance value of less than 90%.
13. The court play lines may be any colour providing they contrast with all colours on adjoining play surfaces. Wall play lines need not be the same colour as floor play lines.
14. Patterns and coaching aids on either the floor or the walls will not normally be permitted however individual designs may be specifically approved by the WSF upon request and following play testing to determine ball visibility.
15. All lines, colours or other markings on the floor shall be non slip in accordance with the Squash Court Specification.